

IMPROVING THE ACCURACY AND RELIABILITY OF AUTOMATIC VESSEL MOTION CONTROL SYSTEM

Zinchenko S. M. – PhD, Senior Lecturer of Ship Handling Department, Head of the Electronic Simulators Laboratory, Kherson State Maritime Academy, Ukraine.

Ben A. P. – PhD, Professor of Navigation and Electronic Navigation Systems Department, Vice – rector for scientific and pedagogical work, Kherson State Maritime Academy, Ukraine.

Nosov P. S. - PhD, Associate Professor of Navigation Systems Department, Kherson State Maritime Academy, Ukraine.

Popovych I. S. - Doctor of Psychological Sciences, Professor of General and Social Psychology Department, Kherson State University, Ukraine

Mamenko P. P. - Senior Lecturer of Ship Handling Department, deep sea captain, Kherson State Maritime Academy, Ukraine.

Mateichuk V. M. - Senior Lecturer of Ship Handling Department, Head of the Electronic Simulators Laboratory, Kherson State Maritime Academy, Ukraine.

ABSTRACT

Context. There were considered the issues of improving the accuracy and reliability of automatic vessel motion control systems in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators. The object of research is the process of automatic vessel motion control in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators. The subject of research is a method and algorithms for improving the accuracy and reliability of automatic vessel motion control systems in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

Objective. The aim of the research is development a method and algorithms for improving the accuracy and reliability of automatic vessel motion control systems in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

Method. This goal is achieved by using in onboard controller of the automatic vessel motion control systems an observer to estimation the parameters of the state vector in the linear motion channel by measurements of linear speed and position sensors; estimation the parameters of the state vector in the angular motion channel by measurements of rotational speed and angular position sensors; continuous monitoring of the measured information by comparing it with the obtained estimations; correction estimations in the linear motion channel by measurements of linear speed and position sensors that have passed control; correction estimations in the angular motion channel by measurements of rotational speed and angular position sensors that have passed control; formation of a sensor failure in the linear motion channel (linear speed sensor or position sensor), if its measurements differ from the corresponding estimations for a greater than permissible value, to parry the failure in the linear motion channel by disconnecting the failed sensor from the observer and further estimation according to another sensor working in pairs; formation of a sensor failure in the angular motion channel (rotation speed sensor or angular position sensor), if its measurements differ from the corresponding estimations for a greater than permissible value, to parry the failure in the angular motion channel by disconnecting the failed sensor from the observer and further estimation according to another sensor working in pair; formation of an actuators failure in the linear motion channel (engine, automation or other device) if a simultaneous or sequential failure of both sensors were detected - linear speed sensor and position sensor, actuator failure alarm in the linear motion channel; formation of an actuators failure in the angular motion channel (rudders, drives, other devices) if a simultaneous or sequential failure of both sensors were detected — rotation speed sensor and angular position sensor, actuator failure alarm in the angular motion channel. This method and algorithms make it possible to improve the accuracy and reliability of automatic vessel motion control processes in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

Results. The proposed method and algorithms for improving the accuracy and reliability of automatic vessel motion control systems in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators were verified by mathematical modeling in the MATLAB environment of the control object movement in a closed circuit with a control system for various types of vessels, navigation areas, weather conditions and cases of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

Conclusions. The results of mathematical modeling confirmed the efficiency of the developed method and algorithms and allow to recommend them for practical use in the development of mathematical support for automatic vessel motion control systems in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

KEYWORDS: parry equipment failure, observer, increased accuracy and reliability of control, mathematical model, onboard controller, state vector estimation, sensor, actuator.

ABBREVIATIONS

MATLAB is Matrix Laboratory;

HF is human factor;

GPS is Global Positioning System.

BCS is a bound coordinate system; is located in the vessel rotation center, the axis OX lies in the diametral plane and is directed toward the bow, the axis OY is directed perpendicular to diametral plane towards the starboard, the axis OZ complements the system to the “right” one.

GCS is a geographical coordinate system; is located in the vessel rotation center, the axis OX_g is directed along the meridian towards the North, the axis OY_g is directed along the parallel towards the East, the axis OZ_g complements the system to the “right” one.

NOMENCLATURE

\mathbf{X} is a state vector of own vessel;
 V_x is component of \mathbf{X} - linear speed along the OX - axis BCS;
 V_y is component of \mathbf{X} - linear speed along the OY - axis BCS;
 V_z is component of \mathbf{X} - linear speed along the OZ - axis BCS;
 ω_x is components of \mathbf{X} - angular rate around the OX - axis BCS;
 ω_y is components of \mathbf{X} - angular rate around the OY - axis BCS;
 ω_z is components of \mathbf{X} - angular rate around the OZ - axis BCS;
 φ is components of \mathbf{X} - angle of rotation around the OX - axis of BCS;
 ϑ is components of \mathbf{X} - angle of rotation around the OY - axis of BCS;
 ψ is components of \mathbf{X} - angle of rotation around the OZ - axis of BCS;
 X_g is components of \mathbf{X} - movement along the OX_g - axis of GCS;
 Y_g is components of \mathbf{X} - movement along the OY_g - axis of GCS;
 Z_g is components of \mathbf{X} - movement along the OZ_g - axis of GCS;
 \mathbf{X}_m is a measured state vector;
 V_{xm} is component of \mathbf{X}_m - measured linear speed along the OX - axis BCS;
 V_{ym} is component of \mathbf{X}_m - measured linear speed along the OY - axis BCS;
 V_{zm} is component of \mathbf{X}_m - measured linear speed along the OZ - axis BCS;
 ω_{xm} is components of \mathbf{X}_m - measured angular rate around the OX - axis BCS;
 ω_{ym} is components of \mathbf{X}_m - measured angular rate around the OY - axis BCS;
 ω_{zm} is components of \mathbf{X}_m - measured angular rate around the OZ - axis BCS;
 φ_m is components of \mathbf{X}_m - measured angle of rotation around the OX - axis of BCS;
 ϑ_m is components of \mathbf{X}_m - measured angle of rotation around the OY - axis of BCS;
 ψ_m is components of \mathbf{X}_m - measured angle of rotation around the OZ - axis of BCS;

X_{gm} is components of \mathbf{X}_m - measured movement along the OX_g - axis of GCS;
 Y_{gm} is components of \mathbf{X}_m - measured movement along the OY_g - axis of GCS;
 Z_{gm} is components of \mathbf{X}_m - measured movement along the OZ_g - axis of GCS;
 \mathbf{X}_w is a estimated state vector;
 V_{xw} is component of \mathbf{X}_w - estimated linear speed along the OX - axis BCS;
 V_{yw} is component of \mathbf{X}_w - estimated linear speed along the OY - axis BCS;
 V_{zw} is component of \mathbf{X}_w - estimated linear speed along the OZ - axis BCS;
 ω_{xw} is components of \mathbf{X}_w - estimated angular rate around the OX - axis BCS;
 ω_{yw} is components of \mathbf{X}_w - estimated angular rate around the OY - axis BCS;
 ω_{zw} is components of \mathbf{X}_w - estimated angular rate around the OZ - axis BCS;
 φ_w is components of \mathbf{X}_w - estimated angle of rotation around the OX - axis of BCS;
 ϑ_w is components of \mathbf{X}_w - estimated angle of rotation around the OY - axis of BCS;
 ψ_w is components of \mathbf{X}_w - estimated angle of rotation around the OZ - axis of BCS;
 X_{gw} is components of \mathbf{X}_w - estimated movement along the OX_g - axis of GCS;
 Y_{gw} is components of \mathbf{X}_w - estimated movement along the OY_g - axis of GCS;
 Z_{gw} is components of \mathbf{X}_w - estimated movement along the OZ_g - axis of GCS;
 $\Delta\mathbf{X}_m$ is a systematic error vector;
 ΔV_{xm} is component of $\Delta\mathbf{X}_m$ - systematic error of measured linear speed along the OX - axis BCS;
 ΔV_{ym} is component of $\Delta\mathbf{X}_m$ - systematic error of measured linear speed along the OY - axis BCS;
 ΔV_{zm} is component of $\Delta\mathbf{X}_m$ - systematic error of measured linear speed along the OZ - axis BCS;
 $\Delta\omega_{xm}$ is components of $\Delta\mathbf{X}_m$ - systematic error of measured angular rate around the OX - axis BCS;
 $\Delta\omega_{ym}$ is components of $\Delta\mathbf{X}_m$ - systematic error of measured angular rate around the OY - axis BCS;
 $\Delta\omega_{zm}$ is components of $\Delta\mathbf{X}_m$ - systematic error of measured angular rate around the OZ - axis BCS;
 $\Delta\varphi_m$ is components of $\Delta\mathbf{X}_m$ - systematic error of measured angle of rotation around the OX - axis of BCS;
 $\Delta\vartheta_m$ is components of $\Delta\mathbf{X}_m$ - systematic error of measured angle of rotation around the OY - axis of BCS;

$\Delta\psi_m$ is components of $\Delta\mathbf{X}_m$ - systematic error of measured angle of rotation around the OZ - axis of BCS;
 ΔX_{gm} is components of $\Delta\mathbf{X}_m$ - systematic error of measured movement along the OXg – axis of GCS;
 ΔY_{gm} is components of $\Delta\mathbf{X}_m$ - systematic error of measured movement along the OYg – axis of GCS;
 ΔZ_{gm} is components of $\Delta\mathbf{X}_m$ - systematic error of measured movement along the OZg – axis of GCS;
 $\delta\mathbf{X}_m$ is a fluctuation error vector;
 δV_{xm} is component of $\delta\mathbf{X}_m$ - fluctuation error of measured linear speed along the OX - axis BCS;
 δV_{ym} is component of $\delta\mathbf{X}_m$ - fluctuation error of measured linear speed along the OY - axis BCS;
 δV_{zm} is component of $\delta\mathbf{X}_m$ - fluctuation error of measured linear speed along the OZ - axis BCS;
 $\delta\omega_{xm}$ is components of $\delta\mathbf{X}_m$ - fluctuation error of measured angular rate around the OX - axis BCS;
 $\delta\omega_{ym}$ is components of $\delta\mathbf{X}_m$ - fluctuation error of measured angular rate around the OY - axis BCS;
 $\delta\omega_{zm}$ is components of $\delta\mathbf{X}_m$ - fluctuation error of measured angular rate around the OZ - axis BCS;
 $\delta\varphi_m$ is components of $\delta\mathbf{X}_m$ - fluctuation error of measured angle of rotation around the OX - axis of BCS;
 $\delta\vartheta_m$ is components of $\delta\mathbf{X}_m$ - fluctuation error of measured angle of rotation around the OY - axis of BCS;
 $\delta\psi_m$ is components of $\delta\mathbf{X}_m$ - fluctuation error of measured angle of rotation around the OZ - axis of BCS;
 δX_{gm} is components of $\delta\mathbf{X}_m$ - fluctuation error of measured movement along the OXg – axis of GCS;
 δY_{gm} is components of $\delta\mathbf{X}_m$ - fluctuation error of measured movement along the OYg – axis of GCS;
 δZ_{gm} is components of $\delta\mathbf{X}_m$ - fluctuation error of measured movement along the OZg – axis of GCS;
 $\nabla\mathbf{X}_m$ is a failure error vector;
 ∇V_{xm} is component of $\nabla\mathbf{X}_m$ - failure error of measured linear speed along the OX - axis BCS;
 ∇V_{ym} is component of $\nabla\mathbf{X}_m$ - failure error of measured linear speed along the OY - axis BCS;
 ∇V_{zm} is component of $\nabla\mathbf{X}_m$ - failure error of measured linear speed along the OZ - axis BCS;
 $\nabla\omega_{xm}$ is components of $\nabla\mathbf{X}_m$ - failure error of measured angular rate around the OX - axis BCS;
 $\nabla\omega_{ym}$ is components of $\nabla\mathbf{X}_m$ - failure error of measured angular rate around the OY - axis BCS;
 $\nabla\omega_{zm}$ is components of $\nabla\mathbf{X}_m$ - failure error of measured angular rate around the OZ - axis BCS;
 $\nabla\varphi_m$ is components of $\nabla\mathbf{X}_m$ - failure error of measured angle of rotation around the OX - axis of BCS;

$\nabla\vartheta_m$ is components of $\nabla\mathbf{X}_m$ - failure error of measured angle of rotation around the OY - axis of BCS;
 $\nabla\psi_m$ is components of $\nabla\mathbf{X}_m$ - failure error of measured angle of rotation around the OZ - axis of BCS;
 ∇X_{gm} is components of $\nabla\mathbf{X}_m$ - failure error of measured movement along the OXg – axis of GCS;
 ∇Y_{gm} is components of $\nabla\mathbf{X}_m$ - failure error of measured movement along the OYg – axis of GCS;
 ∇Z_{gm} is components of $\nabla\mathbf{X}_m$ - failure error of measured movement along the OZg – axis of GCS;
 \mathbf{W} is a vector of external influences from wind, current, waves;
 \mathbf{U} is a vector of controls;
 $\mathbf{U}_l(\theta)$ is component of \mathbf{U} - linear motion control;
 $\mathbf{U}_a(\delta)$ is component of \mathbf{U} - angular motion control;
 θ is a telegraph deflection;
 δ is a steering wheel deflection;
 $\nabla\mathbf{U}_l$ is vector of control deviations in case of failure in the linear channel;
 $\nabla\mathbf{U}_a$ is vector of control deviations in case of failure in the angular channel;
 $\mathbf{F}(\bullet)$ is mathematical model of the control object;
 $\mathbf{F}_w(\bullet)$ is mathematical model of the observer;
 \mathbf{L} is observer gain matrix;
 $\Delta\mathbf{X}$ is residual vector between the measured and estimated vectors;
 $\Delta\mathbf{X}^*$ is a measurement tolerance vector;
 SW_j is a sign of j -sensor malfunction;
 n_b is number of measurements in the control cycle;
 n_f is number of erroneous measurements in control cycles;
 V^* is required speed;
 K^* is required course;
 ω_z^* is required yaw rotation speed;
 k_ψ is yaw channel mismatch coefficient;
 k_ω is yaw rate mismatch coefficient;
 k_f is yaw channel mismatch integral coefficient;
 V_{\max} is vessel's maximum speed.

INTRODUCTION

Currently, more than 90% of all cargo in the world is transported by sea. If we also take into account the presence of a significant number of warships, we can say that the oceans have become quite “crowded”. People and their ship management decisions have caused most maritime accidents. Thus, the Dutch study “100 Sea casualties” revealed that the human factor led to 96 out of 100 accidents. According to the United Kingdom Protection and Indemnity Club, the human factor accounts for 89–96% of ship collisions, 84–88% of tanker accidents, 79%

of towing ship a grounds and costs the marine industry about \$ 541 million a year. A detailed analysis of the causes of ship accidents at sea due to the human factor is given in [1]. The human factor is the weakest link in ship management. Studies of the influence of the human factor on management have been considered in the works of many authors, in particular [1 - 5]. Organizational measures taken to strengthen the training and retraining of skippers, amending the International Convention on Standards of Training, Certification, and Watch keeping for Seafarers [1] in terms of language requirements, other measures did not lead to a significant reduction in accident rates. Experts note that the only way to achieve the desired result is the development and implementation of automated decision support systems and automatic control systems.

Automated decision support systems suggest a person in the control loop and provide him with technical support, for example, in the form of monitoring the parameters of the ship's state vector and propulsion system, the formation of warning messages, control warnings, etc. In such systems, despite the technical support from automated decision support systems, the skipper makes the final decision on the control of the ship, which means, in the control chain there remains the link of the HF with partially indefinite behavior that generates a certain percentage of errors and has large delays in the processing and transmission of information [6-7].

In automatic control systems, the HF link is absent, which gives them great advantages: automatic systems are not subject to fatigue, emotions, stresses; no communication problems; information in the system is transmitted almost without delay, which is especially important when controlled inertial dimensional objects; the task can be solved optimally, which saves time and resources. In automatic systems can be achieved greater control accuracy and reliability. The accuracy of control, in the absence of a HF link, is determined only by the errors of technical devices (sensors and actuators), the scheme and accuracy of the calculations. Using mathematical methods can improve the characteristics of the input signals and increase the accuracy of control.

The work [1] gives an example of a failure of the navigation equipment of the MS Royal Majesty ship. None of the crew found a failure of the equipment and did not even respond to the warning of the Portuguese fishing boats that the vessel was in danger, which ultimately led to the ship's departure from the route for 17 miles and landing aground. In automatic systems, incorrect operation or failure of navigation equipment, equipment in linear motion control channels (automation, engine, propulsion), angular movement control equipment (automation, drives, rudder) can be detected automatically by analyzing the dynamics of the control object. Most modern ships use autopilots, which are representatives of automatic systems. Similarly to autopilots, other automatic control modules can be developed that solve more complex applied problems, for example, automatic divergence with many targets [8-9], automatic wiring in narrowness, opti-

mal maneuvering, etc. The skipper, as in the case of autopilot, only makes a decision about the involvement of the necessary module and controls the implementation of the task, and technical control of the vessel is provided automatically, according to the algorithms laid down in the on-board controller. As follows from the foregoing, automatic control systems have huge advantages over manual control, as well as ADSS systems. Therefore, the development of such systems is an urgent scientific and technical task.

The object of research is the process of automatic vessel motion control in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

The subject of research is a method and algorithms for improving the accuracy and reliability of automatic vessel motion control systems in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

The aim of the research is development a method and algorithms for improving the accuracy and reliability of automatic vessel motion control systems in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

1 PROBLEM STATEMENT

Is given a mathematical model of the movement of the control object in the form of a system of nonlinear differential equations, taking into account the effects of wind, flow and waves, a mathematical model of actuators in the form of a system of linear differential equations with a model of errors and failures, as well as a mathematical model of sensors in the form of a system of algebraic equations with model of errors and failures.

$$\frac{d\mathbf{X}}{dt} = \mathbf{F}(\mathbf{X}, \mathbf{U}) + \mathbf{W}, \quad (1)$$

$$\mathbf{X}_m = \mathbf{X} + \Delta\mathbf{X}_m + \delta\mathbf{X}_m + \nabla\mathbf{X}_m, \quad (2)$$

$$\mathbf{U} = (\mathbf{U}_l(\theta) + \nabla\mathbf{U}_l, \mathbf{U}_a(\delta) + \nabla\mathbf{U}_a). \quad (3)$$

It is required to form such controls θ and δ that would ensure control of the object (1) in conditions of measurement errors and failures of sensors (2) and actuators (3).

2 LITERATURE REVIEW

Article [10] proposed a model for predicting the coordinates of a ship's position in real time using a neural network. In this case, information about the previous trajectory of the vessel is used. This model does not take into account linear and rotation speed and accelerations in the forecast, it does not allow to compare the measured parameters of the vessel motion with the estimated parameters to detect failures of sensors and actuators.

Article [11] investigated a model of the ship's dynamic positioning system by modeling real weather conditions in the laboratory, which allowed not only avoids the risks caused by direct experiments on a real ship, but also re-

duces the cost of the experiment. In order to implement high-precision positioning were used a high-precision mathematical model of the vessel and continuous position information with GPS. To improve positioning accuracy were analyzed the characteristics of many sensors, including radar, differential GPS, ultrasonic sensors, room temperature and others, followed by mathematical methods.

Article [12] considered the problems of wave filtration based on the Kalman filter, there were estimation of the noise covariance parameters, the Kalman filter was adjusted, using the obtained estimation, and its operation was verified in a dynamic positioning system by mathematical modeling.

Article [13] considered a new concept of navigation guidance, which allows to increase the reliability of the provided guidance on changing speed or course in automated decision support systems under conditions of incomplete information on the hydrodynamic model of the vessel and external influences.

Article [14] considered the issues of forecasting the movement of a vessel in a heeling channel. There was proposed an adaptive forecasting model as a combination of models with variable weights to improve the accuracy of forecasting and stability. To determine the weights there was used adaptive recursive identification.

Article [15] considered the issues of forecasting the movement of a vessel in maneuvering areas based on reference vectors. In contrast to forecasting methods based on an explicit mathematical model, there was built a black box model of a maneuvering ship. For the input values of the rudder and the variables of the state vector, as well as the output values of the hydrodynamic forces, there were identified complex nonlinear functions in the Abkowitz model, which were used to predict motion.

Article [16] considered the use of a mathematical model of full-circle propeller vessels for predicting their maneuverability. There was carried out propeller force analysis and synthesized the control of motion models. To test the effectiveness of the developed models and control algorithms, numerical modeling was carried out, the results of which are compared with field tests.

When creating modern aviation gas turbine engines, a significant complication of automatic control and monitoring systems is noted, which increases the probability of various violations in the measurement channel and complicates control tasks.

Article [17] considered the problems of algorithmic detection, localization and parry of failures of sensors and actuators of a digital control system for an aircraft gas turbine engine, which allows to increase the reliability of the system and increase the average time of its failure-free operation by using analytical redundancy instead of hardware, as well as reduce the cost and system weight.

Article [18] presented a methodology for calculating the average uptime of a digital control system for an aircraft gas turbine engine on condition that sensors are detected, localized and parried, using statistical hypothesis testing and a set of observers based on non-linear and piecewise-continuous linear models of the control object.

Matrices of a piecewise continuous model are estimated using transients of a nonlinear model using the random search method. There are given examples of increasing the average uptime due to parry of failures and due to the backup of the sensors of the digital control system of an aircraft gas turbine engine, as well as when using a completely independent backup hydromechanical regulator, which is included in the operation with a complete failure of the main system.

Article [19] proposed an algorithmic reservation method, which consists in using the optimal Kalman observer. The presence of optimal observer provides information redundancy, which allows to increase the fault tolerance of the control system. There are presented the simulation results using a mathematical model of an automatic control system for a turbojet engine and an optimal Kalman filter in both stationary and transient modes of engine operation, in case of sensor failures.

Article [20] presented a technique for detecting, localizing and concretizing the failures of sensors and actuators using a statistical test of hypotheses and a set of nonlinear observers based on a quadratic model of a nonlinear control object. The matrices of the quadratic model are estimated by transients of the state coordinates and control coordinates of the nonlinear model using nonlinear programming. There are presented results of applying the proposed methodology for detecting, localizing, and concretizing the failure of an actuator for metering fuel consumption in the main combustion chamber of an aircraft gas turbine engine.

Article [21] considered the synthesis of a fault-tolerant flight control scheme based on a neural network. The proposed scheme involves diagnostics, fault detection and adaptation. The circuit was tested on an F-16 airplane model in case of drive failure.

Article [22] proposed to include in the algorithms of the onboard control complex a mathematical model of the rotation of the spacecraft. There are presented algorithms for estimating the rotation speed vector using a mathematical model of rotation and determining the failure of the rotation speed sensor. There is considered the problem of identifying an external disturbing moment acting on the spacecraft. There was carried out modeling of the external disturbing moment during the rotation of the spacecraft on a complex mathematical stand and a stand for half-natural modeling "Mars". There are obtained the results of taking into account the external disturbing moment using the least squares method.

As can be seen from the above review, the mathematical model of the control object was used to predict movement in control systems, including the ship [10-16], as well as to detect and parry failures in control systems of gas turbine and turbojet engines, aircraft and spacecraft [17-22].

In the above review there was not found Information about the methods:

- improving the reliability of ship control systems by detecting sensor failures in the channels of linear and angular movement of the control object according to the re-

sults of analysis of its movement dynamics;
 - improving the reliability through parry failures of sensors by replacing their information (received from another sensor working in pair with a failure in one measurement channel, for example, if the linear speed sensor fails, its information can be replaced by position sensor information and vice versa, and if it fails the rotation speed sensor its information can be replaced by the information of the angular position sensor and vice versa);
 - improving reliability by detecting failures of actuators based on the analysis of the dynamics of movement of the control object;

- improving accuracy when maneuvering the vessel by identifying unacceptable deviations of the sensors and replacing their information until the end of the maneuver (for example, during acceleration, braking, and turning the ship, the gyrocompass inertia deviates is present. During the maneuver, the gyrocompass date can be replaced by the rotation speed sensor in the jaw – channel).

3 MATERIALS AND METHODS

Figure 1 shows the block diagram of the control object and the control system.

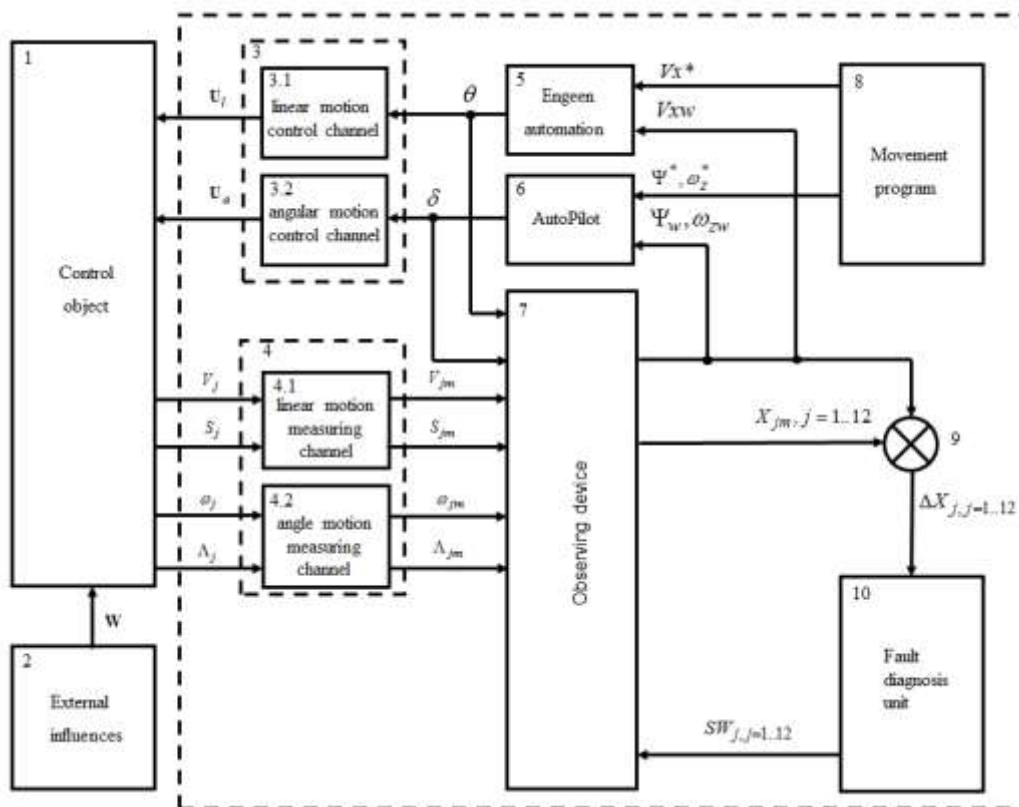


Figure 1 - The block diagram of the control object and the control system

The movement of the control object is presented in a BCS, that moves relative to the GCS. The control object 1 moves under the action of external disturbances \mathbf{W} and controls $\mathbf{U}_l, \mathbf{U}_a$ respectively in the linear and angular movement channels. The state vector parameters — the components of the speed V_x, V_y, V_z and position vector X_g, Y_g, Z_g are measured by a linear motion channel sensor 4.1 with an information processing period in the on-board controller. State vector parameters — the components of the rotation speed $\omega_x, \omega_y, \omega_z$ and angular position φ, θ, ψ are measured by the angular motion channel sensors 4.2 with the information processing period in the onboard controller. The measured parameters

$V_{xm}, V_{ym}, V_{zm}, \omega_{xm}, \omega_{ym}, \omega_{zm}, \varphi_m, \theta_m, \psi_m, X_{gm}, Y_{gm}, Z_{gm}$ as well as the measured controls θ, δ are input to the observer 7. Observer 7 is a mathematical model of the control object and is used to estimate the state vector parameters of the control object. Due to the inaccuracy of the mathematical model and calculation errors, estimate of the state vector parameters with time will be more and more different from the state vector itself. To prevent this divergence, the observer's estimates are adjusted using the residuals between the measured parameters and their estimates.

$$\frac{d\mathbf{X}_w}{dt} = \mathbf{F}_w(\mathbf{X}_w, \mathbf{U}) + \mathbf{L}(\mathbf{X}_m - \mathbf{X}_w). \quad (4)$$

In comparator 9, the measured state vector parameters \mathbf{X}_m are compared at each step of the calculations with the corresponding estimation vector parameters \mathbf{X}_w to form the residual vector $\Delta\mathbf{X} = \mathbf{X}_m - \mathbf{X}_w$, which is fed to the fault diagnosis unit 10. The fault diagnosis unit 10 controls the excess of the residual vector parameters $\Delta\mathbf{X}$ the permissible values $\Delta\mathbf{X}^*$. If one of the parameters $\Delta\mathbf{X}_j$ exceeds the permissible value $\Delta\mathbf{X}_j^*$, the failure diagnosis unit 10 feeds to the input of the observer 7 a signal $SW_j = 0$ to reset the j -column of the matrix \mathbf{L} in order to prevent distortion of the state vector estimates by the j -sensor. In this case, a further estimate of the state vector \mathbf{X}_w is made according to the replacement information. Replacement information is the information of another sensor, operating in the same measurement channel, for example, speed and position sensors work in a linear motion channel and can replace each other when one of them failed, and angular rate sensor and angular position sensor also work in one channel angular motion and can replace each other when one of them failed.

The fault diagnosis unit 10 monitors the dates of the j -sensor, as well as other sensors, at each control interval n_b . If the number of unreliable measurements $n_f = 0$ during the control interval n_b , the failure diagnosis unit 10 returns $SW_j = 1$, otherwise $SW_j = 0$. If at the same time or sequentially, after a short time interval, the fault diagnosis unit 10 detects a failure of the main and replacement sensors, then this is regarded as a failure in the control channel in which the failures of the main and replacement sensors were detected. For example, a simultaneous or sequential failure of the speed sensor and the position sensor in the linear motion channel is regarded as the failure of the linear control channel (engine, propulsion device, amplifiers, automation or any other device whose failure can violate the relationship between the screw force and telegraph position). Also, the simultaneous or sequential failure of the main and replacement sensors in the angular motion channel is regarded as a failure in the angular control channel (steering wheel, drive, amplifiers, automation, or any other device whose failure can violate the relationship between the control moment and the position of the steering wheel).

Estimations of the yaw angle ψ_w and yaw rate ω_{zw} from the output of the observer 7, as well as the required course K^* and the required yaw rate ω_z^* , from the block of motion programs 8, are fed to the inputs of the autopilot 6, where control δ is formed

$$\delta = k_\psi (\psi_w - K^*) + k_\omega (\omega_{zw} - \omega_z^*) + k_f \int (\psi_w - K^*) dt.$$

The speed estimation V_{xw} from the output of the observer 7, as well as the required speed V_x^* from the block of motion programs 8 are fed to the inputs of engine automation unit 5, where control θ is formed

$$\theta = \frac{\pi}{2} \frac{V_x^*}{V_{\max}}$$

4 EXPERIMENTS

Verification of the operability and effectiveness of the method and algorithms for improving the accuracy and reliability of automatic vessel motion control systems in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators, as well as the mathematical support developed on its basis, was verified by mathematical modeling in the MATLAB environment of a control object in a closed circuit with a control system including an observer and a fault diagnosis unit.

During all experiments, the following measurement errors were adopted:

- linear speeds: systematic $\Delta V_{xm}, \Delta V_{ym}, \Delta V_{zm} = 0.5$ m/s, fluctuation $\delta V_{xm}, \delta V_{ym}, \delta V_{zm} = 0.21$ m/s;
- position: systematic $\Delta X_g, \Delta Y_g, \Delta Z_g = 10$ m/s, fluctuation $\delta X_g, \delta Y_g, \delta Z_g = 5$ m/s;
- angular rate: systematic $\Delta \omega_{xm}, \Delta \omega_{ym}, \Delta \omega_{zm} = 0.002$ dg/s, fluctuation $\delta \omega_{xm}, \delta \omega_{ym}, \delta \omega_{zm} = 0.002$ dg/s;
- angular position: systematic $\Delta \varphi_m, \Delta \theta_m, \Delta \psi_m = 1$ dg, fluctuation $\delta \varphi_m, \delta \theta_m, \delta \psi_m = 1$ dg;

Fig. 2 shows the results of detecting sensor failures during acceleration of the vessel and simultaneous yaw turning on 45 dg.

The graphs are shown (vertically):

- measured speed V_{xm} , yaw angle ψ_m and position Y_{gm} ;
- estimated speed V_{xw} , yaw angle ψ_w and position Y_{gw} ;
- matrix gain coefficients \mathbf{L} for measurements V_{xm}, ψ_m, Y_{gm} .

For 50 s, 70 s and 20 s were simulated respectively a failure error of measured linear speed V_{xm} , measured yaw angle ψ_m , and measured position Y_{gm} . Inadmissible deviations of measured linear speed, measured yaw angle and measured position from their estimations were revealed. To exclude the influence of unacceptable deviations of the sensors on the estimations, the matrix gains for these measurements are zeroed. After restoration of the sensors, the gain is restored.

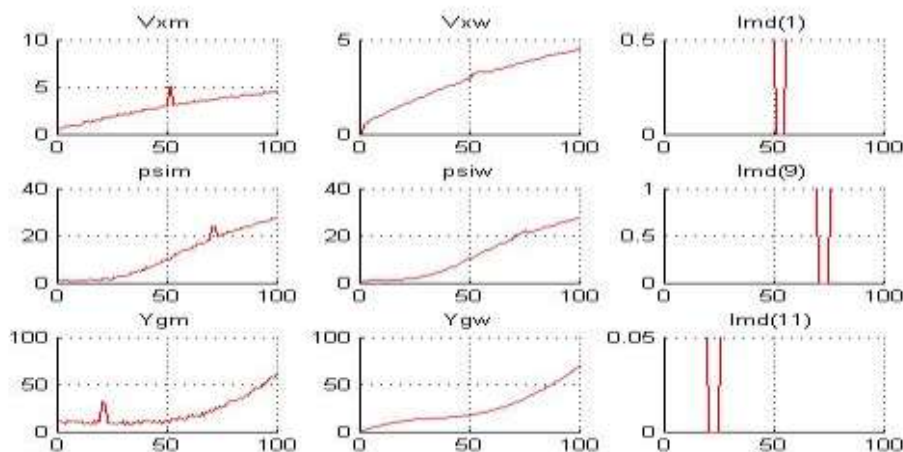


Figure 2 – The results of detecting sensor failures

Fig. 3 shows results of detection and parry linear speed sensor failure during acceleration of the vessel from zero speed to maximum.

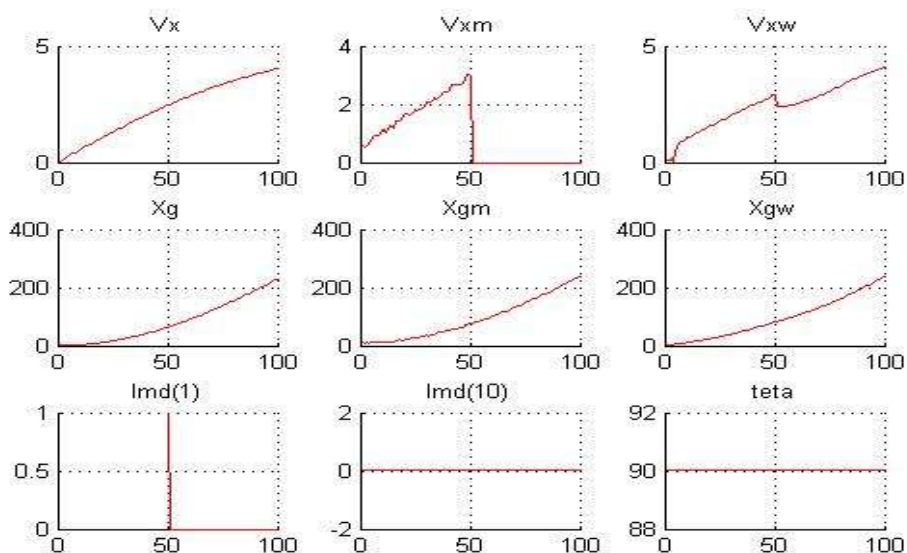


Figure 3 – Detection and parry linear speed sensor failure

The graphs are shown (horizontally):

- linear speed V_x , measured speed V_{xm} , estimated speed V_{xw} ;
- movement X_g , measured movement X_{gm} , estimated movement X_{gw} ;
- matrix gain coefficients lmd (1) for measured speed V_{xm} and lmd (10) for measured movement X_{gm} as well as telegraph deflection θ .

For 50 s was simulated linear speed sensor failure. As can be seen from the simulation results, this failure was detected and parried (matrix gain coefficients lmd (1) was reset to zero and further estimation V_{xw} was carried out only by measurements X_{gm} of the replacement sensor).

Fig. 4 shows results of detection and parry yaw angle sensor failure during a turn of the vessel at angle of 45 degrees..

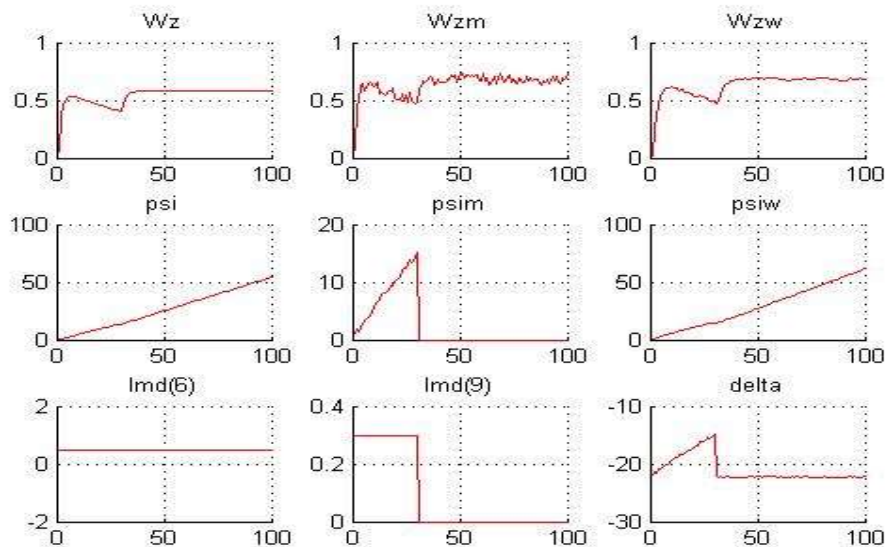


Figure 4 – Detection and parry yaw angle sensor failure

The graphs are shown (horizontally):

- yaw rate ω_z , measured yaw rate ω_{zm} , estimated yaw rate ω_{zw} ;
- yaw angle ψ , measured yaw angle ψ_m , estimated yaw angle ψ_w ;
- matrix gain coefficients lmd (6) for measured yaw rate ω_{zm} and lmd (9) for measured yaw angle ψ_m as well as the steering wheel deflection δ .

For 30 s was simulated the yaw angle sensor failure. As can be seen from the simulation results, this failure was detected and parried (matrix gain coefficients lmd (9) was reset to zero and further estimation ψ_w was carried out only by measurements ω_{zm} of the replacement sensor.

Fig. 5 shows the results of detection linear motion control channel failure, when the vessel was moving at maximum speed. The graphs are shown (horizontally):

- linear speed V_x , measured linear speed V_{xm} , estimated linear speed V_{xw} ;

- movement X_g , measured movement X_{gm} , estimated movement X_{gw} ;

- matrix gain coefficients lmd (1) for measured linear speed V_{xm} and lmd (10) for measured movement X_{gm} as well as the telegraph deflection θ .

For 50 s the engine failure was simulated (the screw force does not correspond to the telegraph deflection θ). As can be seen from the simulation results, this failure manifested itself through the failures of both sensors - linear speed sensor and movement sensor. Since the probability of simultaneous failure of two sensors is small, it was diagnosed not a sensors failure but linear motion control channel failure (engine, propulsion device, amplifiers, automation, or any other device, the failure of which may violate the relationship between the screw force and telegraph deflection θ).

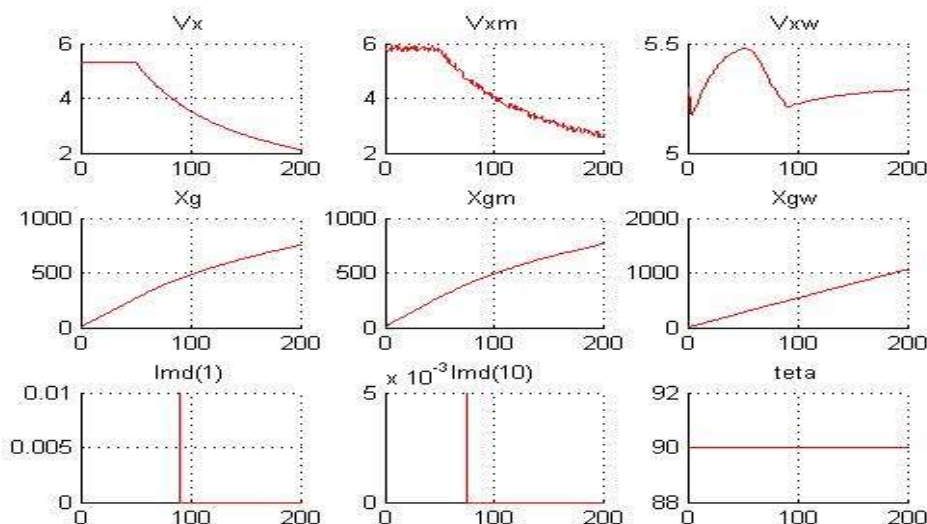


Figure 5 – Detection linear motion control channel failure

Fig. 6 shows the results of detection of angle motion control channel failure, when the vessel turns 45 degrees.

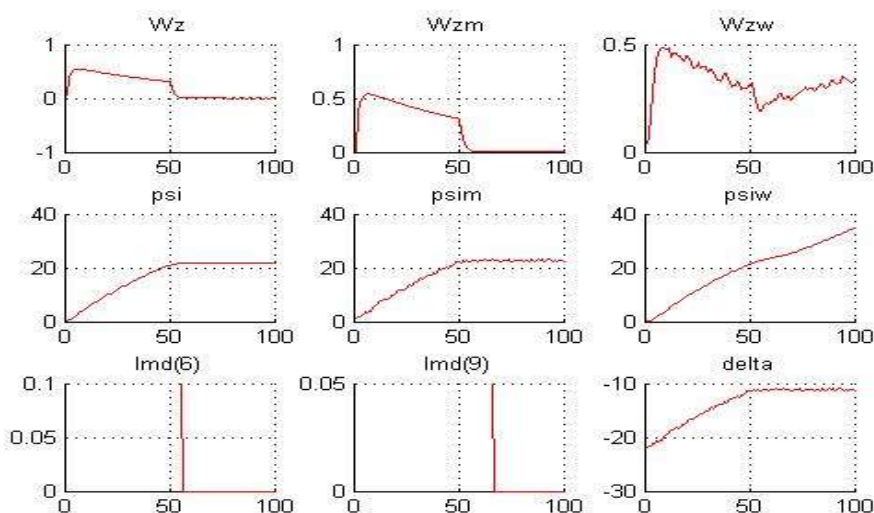


Figure 6 – Detection of angle motion control channel failure

For 50 s the engine failure was simulated (the screw force does not correspond to the telegraph deflection θ). As can be seen from the simulation results, this failure manifested itself through the failures of both sensors - linear speed sensor and movement sensor. Since the probability of simultaneous failure of two sensors is small, it was diagnosed not a sensors failure but linear motion control channel failure (engine, propulsion device, amplifiers, automation, or any other device, the failure of which may violate the relationship between the screw force and telegraph deflection θ).

The graphs are shown (horizontally):

- yaw rate ω_z , measured yaw rate ω_{zm} , estimated yaw rate ω_{zw} ;

- yaw angle ψ , measured yaw angle ψ_m , estimated yaw angle ψ_w ;

- matrix gain coefficients lmd (6) for measured yaw rate ω_{zm} and lmd (9) for measured yaw angle ψ_m as well as the steering wheel deflection δ .

For 50 s simulated failure in the channel of angular motion (the control moment does not correspond to the steering wheel deflection δ). As can be seen from the simulation results, this failure manifested itself through the failures of both sensors - yaw rate sensor and yaw sensor. Since the probability of simultaneous failure of two sensors is small, it was diagnosed not a sensors failure but angular motion control channel failure (ruder, drive, amplifiers, automation, or any other device, the

failure of which may violate the relationship between the control moment and the position of the steering wheel).

5 RESULTS

There were considered the issues of improving the accuracy and reliability of automatic vessel motion control systems in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators. There were analyzed the existing methods of increasing the accuracy and reliability of control in automatic systems, their shortcomings was identified and the relevance of solving this problem was substantiated. There were developed the method and algorithms for improving the accuracy and reliability of automatic vessel motion control systems in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators. The effectiveness of the proposed method and algorithms were verified by mathematical modeling of the control object in a closed circuit with a control system in the MATLAB environment for various types of ships, navigation areas, weather conditions and cases of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

6 DISCUSSION

The proposed method and algorithms make it possible to improve the accuracy and reliability of automatic vessel motion control systems in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

As shown by the results of mathematical modeling, the proposed method and algorithms are operable and, compared with the known solutions [1–20], can improve the accuracy and reliability of controlling the linear and angular motion of the vessel during intensive maneuvering and possible failures of sensors and actuators.

The proposed method can be used in the development of mathematical support for automatic vessel control systems operating in such conditions.

CONCLUSIONS

There were proposed a method and algorithms to improve the accuracy and reliability of the automatic vessel control systems.

The scientific novelty of the obtained results consists in the fact that for the first time were proposed a method and algorithms for improving the accuracy and reliability of the automatic vessel control systems working in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

This is achieved by using in onboard controller of the automatic vessel motion control systems an observer to estimation the parameters of the state vector in the linear motion channel by measurements of linear speed and position sensors; estimation the parameters of the state vector in the angular motion channel by measurements of rotational speed and angular position sensors; continuous monitoring of the measured information by comparing it with the obtained estimations; correction estimations in

the linear motion channel by measurements of linear speed and position sensors that have passed control; correction estimations in the angular motion channel by measurements of rotational speed and angular position sensors that have passed control; formation of a sensor failure in the linear motion channel (linear speed sensor or position sensor), if its measurements differ from the corresponding estimations for a greater than permissible value, to parry the failure in the linear motion channel by disconnecting the failed sensor from the observer and further estimation according to another sensor working in pairs; formation of a sensor failure in the angular motion channel (rotation speed sensor or angular position sensor), if its measurements differ from the corresponding estimations for a greater than permissible value, to parry the failure in the angular motion channel by disconnecting the failed sensor from the observer and further estimation according to another sensor working in pair; formation of an actuators failure in the linear motion channel (engine, automation or other device) if a simultaneous or sequential failure of both sensors were detected - linear speed sensor and position sensor, actuator failure alarm in the linear motion channel; formation of an actuators failure in the angular motion channel (rudders, drives, other devices) if a simultaneous or sequential failure of both sensors were detected — rotation speed sensor and angular position sensor, actuator failure alarm in the angular motion channel. This method and algorithms make it possible to improve the accuracy and reliability of automatic vessel motion control processes in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators. This method and algorithms can improve the accuracy and reliability of automatic control of the movement of the vessel in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

The proposed method and algorithms for improving the accuracy and reliability of automatic vessel motion control systems in conditions of large deviations in sensors measurements during maneuvering and failures of sensors and actuators were verified by mathematical modeling in the MATLAB environment of the control object movement in a closed circuit with a control system for various types of vessels, navigation areas, weather conditions and cases of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

The practical value of the obtained results lies in the fact that the developed method and algorithms were tested by mathematical modeling in the MATLAB environment of the control object movement in a closed circuit with a control system for various types of vessels, navigation areas, weather conditions and cases of large deviations in sensors measurements during maneuvering and failures of sensors and actuators.

Mathematical modeling confirmed the efficiency of the developed method and algorithms and allows to recommend them for practical use in the development of mathematical support of vessel motion control systems.

Further research may be related to the development of methods and algorithms that increase the reliability of fault detection and prediction accuracy.

ACKNOWLEDGEMENTS

The work was carried out in the framework of the research “Development of software solutions for dynamic functions of dynamically positioning systems of marine vessels”, (state registration number 0119U100948), Department of Navigation and Electronic Navigation Systems of Kherson State Maritime Academy.

REFERENCES

1. Apostol - Mates R. Human error – the main factor in marine accidents / R. Apostol - Mates, A. Barbu // Naval Academy Scientific Bulletin. – 2016. - Vol. 19. - Issue 2. DOI: 10.21279/1454-864X-16-I2-068
2. Sotiralis P. Incorporation of human factors into ship collision risk models focusing on human centred design aspects / P. Sotiralis, N. P. Ventikos, R. Hamann, P. Golyshev, A. P. Teixeira // Reliability Engineering & System Safety. – 2016. - Vol. - 156. - P. 210-227. DOI: 10.1016/j.ress.2016.08.007
3. Luo M. Half-century research developments in maritime accidents: Future directions / M. Luo, S. Shin // Accident Analysis & Prevention. – 2019. - Vol. 123. - P. 448-460. DOI: 10.1016/j.aap.2016.04.010
4. Popovych I. S. Research of Relationship between the Social Expectations and Professional Training of Lyceum Students studying in the Field of Shipbuilding / I. S. Popovych, O. Ye Blynova, M. I. Aleksieieva, P. S. Nosov, N. Ye. Zavatska, O. O. Smyrnova // Revista Espacios. – 2019. - Vol. 40. - Issue 33. - P. 21-34.
5. Popovych I. Psychology of Social Expectations of Personality: Methodology, Theory and Practice Kherson: OLDI-PLUS. 2019.
6. Nosov P. S. Identification of “Human error” negative manifestation in maritime transport / P. S. Nosov, A. P. Ben, V. N. Mateichuk, M. S. Safonov // Radio Electronics, Computer Science, Control. – 2018. - Vol. 4 (47). - P. 204-213. DOI: 10.15588/1607-3274-2018-4-20
7. Nosov P. Approaches going to determination periods of the human factor of navigators during supernumerary situations / P. Nosov, A. Ben, A. Safonova, I. Palamarchuk // Radio Electronics, Computer Science, Control. – 2019. – Vol. 2(49). - P. 140-150. DOI: 10.15588/1607-3274-2019-2-15
8. Zinchenko S. M. Automatic collision avoidance with many targets, including maneuvering ones / S. M. Zinchenko, P. S. Nosov, V. M. Mateichuk, P. P. Mamenko, O. O. Grosheva // Radio Electronics, Computer Science, Control. – 2019. - Vol. 4. - P. 211 – 222. DOI: 10.15588/1607-3274-2019-4-20
9. Zinchenko S. Automatic collision avoidance with many targets, including maneuvering ones / S. Zinchenko, P. Nosov, V. Mateichuk, P. Mamenko, O. Grosheva // The International scientific and practical conference dedicated to the memory of professor Fomin Y.Y. and Semenov V. S. (FS - 2019), Odessa - Istanbul - Odessa, 24 – 28 April, 2019, proceedings. – ONMU, 2019. - P. 343-349.
10. Sazonov A. Prognozovanie traektorii dvizheniya sudna pri pomoshi nejronnoj seti [Elektronnyj resurs] / A. Sazonov, A. Safronov, V. Deryabin // Vestnik gosudarstvennogo universiteta morskogo i rechnogo flota imeni admirala S. O. Makarova. – 2013. - № 3. Tochka dostupa: <https://cyberleninka.ru/article/n/prognozovanie-traektorii-dvizheniya-sudna-pri-pomoschi-nejronnoj-seti>.
11. Xiong J. A Scheme on Indoor Tracking of Ship Dynamic Positioning Based on Distributed Multi-Sensor Data Fusion / J. Xiong, L. Shu, Q. Wang, W. Xu, Ch. Zhu // IEEE Access. – 2016. - Vol. - 5. - P. 379 – 392. DOI: 10.1109/ACCESS.2016.2607232
12. Fossen T. I. Kalman filtering for positioning and heading control of ships and offshore rigs / T. I. Fossen, T. Perez // IEEE Control Systems Magazine. – 2009. - Vol. 29. - Issue 6. - P. 32 – 46. DOI: 10.1109/MCS.2009.934408
13. Nielsen U. D. A novel approach for navigational guidance of ships using onboard monitoring systems / U. D. Nielsen, J. Jensen // Ocean Engineering. – 2011. - Vol. - 38. - Issues 2–3. - P. 444-455. DOI: 10.1016/j.oceaneng.2010.11.024
14. Peng X. Ship motion prediction of combination forecasting model based on adaptive variable weight / X. Peng, B. Zhang, L. Rong // 34th Chinese Control Conference (CCC), 28-30 July, 2015: proceedings. - Hangzhou, China (Lecture Notes in IEEE Xplore. – 2015). DOI: 10.1109/ChiCC.2015.7260259
15. Luo W. Blind Prediction of Ship Maneuvering by Using Support Vector Machines / W. Luo, Z. Zou // 29th International Conference on Ocean, Offshore and Arctic Engineering (ASME 2010), 6 – 11 June, 2010: proceeding. - Shanghai, China (Lecture Notes in American Society of Mechanical Engineers. – 2010. - P. 437- 443). DOI: 10.1115/OMAE2010-20723
16. Wu X.. Maneuverability prediction for a ship with full-revolving twin propellers / X. Wu, X. Gao // Chinese Journal of Ship Research. - 2017. - Vol. 12. - Issue 1, DOI: 10.3969/j.issn.1673-3185.2017.01.005
17. Lejbov R. Obnaruzhenie, lokalizaciya i parirovanie otkazov datchikov i ispolnitelnyh ustrojstv v cifrofoj sisteme upravleniya / R. Lejbov // Aviakosmicheskoe priborostroenie. – 2005. - № 12. - S. 9-14. eLIBRARY ID: 1554169518
18. Lejbov R. Kompensaciya otkazov datchikov cifrovoj sistemy avtomaticheskogo upravleniya s ispolzovaniem kusochno – nepreryvnoj linejnoy i nelinejnoy matematicheskikh modelej obekta upravleniya / R. Lejbov, O. Gurevich // Aviakosmicheskoe priborostroenie. – 2018. - №11. - S. 23-37. eLIBRARY:36515644
19. Inozemcev A. Sintez optimalnogo nablyudatelya pri otkazah v kanale izmereniya sistem avtomaticheskogo kontrolya turboreaktivnogo dvuhkonturnogo dvigatelya / A. Inozemcev, N. Lamanova, A. Sazhenkov, I. Lisovin, I. Gribkov, A. Pleshivyh // Vestnik permskogo nacionalnogo issledovatel'skogo politehnicheskogo universiteta. Aerokosmicheskaya tehnika. – 2019. - № 57. - S. 162-171. DOI: 10.15593/2224-9982/2019.57.1320
20. Lejbov R. Obnaruzhenie, lokalizaciya i konkretizaciya otkazov datchikov i ispolnitelnyh ustrojstv s pomoshyu kvadrachnoy modeli nelinejnogo obekta upravleniya / R. Lejbov // Aviakosmicheskoe priborostroenie. – 2016. - № 4. - P. 24-42. eLIBRARY ID: 25836783
21. Chen Y. M. Neural networks-based scheme for system failure detection and diagnosis / Y. M. Chen, M. L. Lee // Mathematics and Computers in Simulation. – 2002. - Vol. 58. - Issue 2. - P. 101-109. DOI: 10.1016/S0378-4754(01)00330-5
22. Zadorozhnaya N. Ispolzovanie etalonnogo modeli vrasheniya kosmicheskogo apparata dlya identifikacii otkaza izmeritelya uglovoj skorosti / N. Zadorozhnaya, P. Samus // Internet – zhurnal «Naukovedenie». – 2015. - t.7. - № 4 (29). - S.78. DOI: 10.15862/03TVN415

Received 00.00.2000.

Accepted 00.00.2000.

УДК 004.942:656.61.052

ПІДВИЩЕННЯ ТОЧНОСТІ ТА НАДІЙНОСТІ АВТОМАТИЧНИХ СИСТЕМ КЕРУВАННЯ РУХОМ СУДНА

Зінченко С. М. – кандидат технічних наук, старший викладач кафедри управління судном, завідувач лабораторії електронних тренажерів, Херсонська державна морська академія, Херсон, Україна.

Бень А. П. – кандидат технічних наук, професор кафедри судноводіння та електронних навігаційних систем, проректор з науково – педагогічної роботи, Херсонська державна морська академія, Херсон, Україна.

Носов П. С. – кандидат технічних наук, доцент кафедри судноводіння та електронних навігаційних систем, Херсонська державна морська академія, Херсон, Україна.

Попович І. С. – доктор психологічних наук, професор кафедри загальної та соціальної психології, Херсонський державний університет, Херсон, Україна.

Маменко П. П. – капітан далекого плавання, старший викладач кафедри управління судном, Херсонська державна морська академія, Херсон, Україна.

Матейчук В. М. – старший викладач кафедри управління судном, завідувач лабораторії електронних тренажерів, Херсонська державна морська академія, Херсон, Україна.

АНОТАЦІЯ

Актуальність. Розглянуті питання підвищення точності і надійності систем автоматичного керування рухом судна при значних відхиленнях вимірюваної сенсором інформації у процесі маневрування судна та при відмовах сенсорів і виконуючих пристроїв. Об'єктом дослідження є процес автоматичного керування рухом судна при значних відхиленнях вимірюваної сенсором інформації у процесі маневрування судна та при відмовах сенсорів і виконуючих пристроїв. Суб'єктом дослідження є метод і алгоритми підвищення точності і надійності систем автоматичного керування рухом судна при значних відхиленнях вимірюваної сенсором інформації у процесі маневрування судна та при відмовах сенсорів і виконуючих пристроїв.

Мета. Метою дослідження є розробка методу та алгоритмів підвищення точності і надійності систем автоматичного керування рухом судна при значних відхиленнях вимірюваної сенсором інформації у процесі маневрування судна та при відмовах сенсорів і виконуючих пристроїв.

Метод. Ця мета досягається за рахунок використання у бортовому контролері системи автоматичного керування рухом судна оцінювача параметрів вектору стану у каналі лінійного руху по даним вимірювання лінійної швидкості і переміщення; оцінювання параметрів вектору стану у каналі кутового руху по даним вимірювання кутової швидкості і переміщення, постійного контролю за достовірністю вимірюваної інформації шляхом її порівняння з отриманими оцінками параметрів вектору стану; коригування оцінок у каналі лінійного руху по виміряним сенсором даним лінійної швидкості і лінійного переміщення, що пройшли перевірку; коригування оцінок у каналі кутового руху по виміряним сенсором даним кутової швидкості і кутового переміщення, що пройшли перевірку; формування відмови датчика у каналі лінійного руху (датчика лінійної швидкості або датчика лінійного переміщення), якщо його вимірювання відрізняються від оцінок на величину більшу допустимої, парирування відмови датчика у каналі лінійного руху шляхом його відключення від оцінювача та подальшого оцінювання по інформації іншого датчика, що працює з ним у парі; формування відмови датчика у каналі кутового руху (датчика кутової швидкості або датчика кутового положення), якщо його вимірювання відрізняються від оцінок на величину більшу допустимої, парирування відмови датчика у каналі кутового руху шляхом його відключення від оцінювача та подальшого оцінювання параметрів по інформації іншого датчика, що працює з ним у парі; формування відмови по управлінню у каналі лінійного руху (силової установки, автоматики або іншого виконуючого пристрою), якщо одночасно, або послідовно, через невеликий проміжок часу, зафіксована відмова обох датчиків (лінійної швидкості і лінійного переміщення), формування аларму про відмову управління у каналі лінійного руху; формування відмови по управлінню у каналі кутового руху (керма, приводів, інших виконуючих пристроїв), якщо одночасно або послідовно, через невеликий проміжок часу, зафіксовано відмову обох датчиків (кутової швидкості і кутового переміщення), формування аларму у каналі управління кутовим рухом. Даний метод та алгоритми дозволяють підвищити точність та надійність автоматичної системи керування рухом судна при значних відхиленнях вимірюваної сенсором інформації у процесі маневрування та при відмовах сенсорів і виконуючих пристроїв.

Результати. Запропонований метод і алгоритми підвищення точності і надійності систем автоматичного керування рухом судна були перевірені математичним моделюванням у середовищі MATLAB процесів керування рухом судна у замкнутій схемі із системою керування для різних типів суден, районів плавання, погодних умов, випадків значних відхилень вимірюваної інформації при маневруваннях та відмов сенсорів і виконуючих пристроїв.

Висновки. Результати проведеного математичного моделювання підтвердили працездатність та ефективність запропонованого методу і алгоритмів та дозволяють рекомендувати їх для практичного використання при розробці математичного забезпечення бортових контролерів систем автоматичного керування рухом суден, що працюють в умовах значних відхилень вимірюваної інформації у процесі маневрування та в умовах відмов сенсорів і виконуючих пристроїв.

КЛЮЧОВІ СЛОВА: парирування відмов обладнання, оцінювач, підвищення точності і надійності управління, математична модель, бортовий комп'ютер, оцінювання вектору стану, сенсор, виконуючий пристрій.

УДК 004.942:656.61.052

ПОВЫШЕНИЕ ТОЧНОСТИ И НАДЕЖНОСТИ АВТОМАТИЧЕСКИХ СИСТЕМ УПРАВЛЕНИЯ ДВИЖЕНИЕМ СУДНА

© Zinchenko S. M., Ben A. P., Nosov P. S., Popovych I. S., Mamenko P. P., Mateichuk V. M., 2020
DOI 10.00000/0000-0000-0000-0-0

Зинченко С. Н. – кандидат технических наук, старший преподаватель кафедры управления судном, заведующий лабораторией электронных тренажеров, Херсонская государственная морская академия, Херсон, Украина.

Бень А. П. – кандидат технических наук, профессор кафедры судовождения и электронных навигационных систем, проректор по научно – педагогической работе, Херсонская государственная морская академия, Херсон, Украина.

Носов П. С. – кандидат технических наук, доцент кафедры судовождения и электронных навигационных систем, Херсонская государственная морская академия, Херсон, Украина.

Попович И. С. – доктор психологических наук, профессор кафедры общей и социальной психологии, Херсонский государственный университет, Херсон, Украина.

Маменко П. П. – капитан дальнего плавания, старший преподаватель кафедры управления судном, Херсонская государственная морская академия, Херсон, Украина.

Матейчук В. Н. – старший преподаватель кафедры управления судном, заведующий лабораторией электронных тренажеров, Херсонская государственная морская академия, Херсон, Украина.

АННОТАЦИЯ

Актуальность. Рассмотрены вопросы повышения точности и надежности систем автоматического управления движением судна в условиях повышенных ошибок измерений при маневрировании и отказов сенсоров и исполнительных устройств. Объектом исследования является процесс автоматического управления движением судна в условиях повышенных ошибок измерений при маневрировании и отказов сенсоров и исполнительных устройств. Субъектом исследования является метод и алгоритмы повышения точности и надежности систем автоматического управления движением судна в условиях повышенных ошибок измерений при маневрировании и отказов сенсоров и исполнительных устройств.

Цель. Целью исследования является разработка метода и алгоритмов повышения точности и надежности систем автоматического управления движением судна в условиях повышенных ошибок измерений при маневрировании и отказов сенсоров и исполнительных устройств.

Метод. Эта цель достигается за счет использования в бортовом контроллере системы автоматического управления движением судна наблюдающего устройства для оценки параметров вектора состояния в канале линейного движения по данным измерений линейной скорости и перемещения; оценивания параметров вектора состояния в канале углового движения по данным измерений угловой скорости и углового перемещения, постоянного контроля за достоверностью измеряемой информации путем ее сравнения с полученными оценками параметров вектора состояния; корректировки оценок в канале линейного движения по измерениям линейной скорости и линейного перемещения, которые прошли контроль; корректировки оценок в канале углового движения по измерениям угловой скорости и углового перемещения, которые прошли контроль; формирование отказа датчика в канале линейного движения (датчика линейной скорости или датчика линейного перемещения), если его измерения отличаются от оценок на величину, большую допустимой, парирование отказа датчика в канале линейного движения путем его отключения от наблюдателя и дальнейшего оценивания по информации другого датчика, что работает с ним в паре; формирование отказа датчика в канале углового движения (датчика угловой скорости или датчика углового перемещения), если его измерения отличаются от оценок на величину, большую допустимой, парирование отказа датчика в канале углового движения путем его отключения от наблюдателя и дальнейшего оценивания по информации другого датчика, что работает с ним в паре; формирование отказа по управлению в канале линейного движения (силовой установки, автоматики или другого исполнительного устройства), если одновременно или последовательно, через небольшой промежуток времени, выявлены отказы обоих датчиков (линейной скорости и линейного перемещения), формирование аларма об отказе управления в канале линейного движения; формирование отказа по управлению в канале углового движения (руля, приводов, автоматики или другого исполнительного устройства), если одновременно или последовательно, через небольшой промежуток времени, выявлены отказы обоих датчиков (угловой скорости и углового перемещения), формирование аларма об отказе управления в канале углового движения. Данный метод и алгоритмы позволяют повысить точность и надежность систем автоматического управления движением судна в условиях повышенных ошибок измерений при маневрировании и отказов сенсоров и исполнительных устройств.

Результаты. Предложенный метод и алгоритмы повышения точности и надежности систем автоматического управления движением судна были проверены математическим моделированием в среде MATLAB процессов управления движением судна для различных типов судов, районов плавания, погодных условий, случаев повышенных ошибок измерений при маневрировании и отказов сенсоров и исполнительных устройств.

Выводы. Результаты проведенного математического моделирования подтверждают работоспособность и эффективность предложенного метода и алгоритмов и позволяют рекомендовать их для практического использования при разработке математического обеспечения бортовых контроллеров систем автоматического управления движением судов, которые работают в условиях повышенных ошибок измерений при маневрировании и отказов сенсоров и исполнительных устройств.

КЛЮЧЕВЫЕ СЛОВА: парирование отказов оборудования, наблюдатель, повышение точности и надежности управления, математическая модель, бортовой контроллер, оценка вектора состояния, сенсор, исполнительное устройство.

1. Apostol - Mates R. Human error – the main factor in marine accidents / R. Apostol - Mates, A. Barbu // Naval Academy Scientific Bulletin. – 2016. - Vol. 19. - Issue 2. DOI: 10.21279/1454-864X-16-I2-068
2. Sotiralis P. Incorporation of human factors into ship collision risk models focusing on human centred design aspects / P. Sotiralis, N. P. Ventikos, R. Hamann, P. Golyshev, A. P.

ЛІТЕРАТУРА / LITERATURA

- Teixeira // Reliability Engineering & System Safety. – 2016. - Vol. - 156. - P. 210-227. DOI: 10.1016/j.ress.2016.08.007
3. Luo M. Half-century research developments in maritime accidents: Future directions / M. Luo, S. Shin // Accident Analysis & Prevention. – 2019. - Vol. 123. - P. 448-460. DOI: 10.1016/j.aap.2016.04.010
 4. Popovych I. S. Research of Relationship between the Social Expectations and Professional Training of Lyceum Students studying in the Field of Shipbuilding / I. S. Popovych, O. Ye Blynova, M. I. Aleksieieva, P. S. Nosov, N. Ye. Zavatska, O. O. Smyrnova // Revista Espacios. – 2019. - Vol. 40. - Issue 33. - P. 21-34.
 5. Popovych I. Psychology of Social Expectations of Personality: Methodology, Theory and Practice Kherson: OLDIPLUS. 2019.
 6. Nosov P. S. Identification of “Human error” negative manifestation in maritime transport / P. S. Nosov, A. P. Ben, V. N. Mateichuk, M. S. Safonov // Radio Electronics, Computer Science, Control. – 2018. - Vol. 4 (47). - P. 204-213. DOI: 10.15588/1607-3274-2018-4-20
 7. Nosov P. Approaches going to determination periods of the human factor of navigators during supernumerary situations / P. Nosov, A. Ben, A. Safonova, I. Palamarchuk // Radio Electronics, Computer Science, Control. – 2019. – Vol. 2(49). - P. 140-150. DOI: 10.15588/1607-3274-2019-2-15
 8. Zinchenko S. M. Automatic collision avoidance with many targets, including maneuvering ones / S. M. Zinchenko, P. S. Nosov, V. M. Mateichuk, P. P. Mamenko, O. O. Grosheva // Radio Electronics, Computer Science, Control. – 2019. - Vol. 4. - P. 211 – 222. DOI: 10.15588/1607-3274-2019-4-20
 9. Zinchenko S. Automatic collision avoidance with many targets, including maneuvering ones / S. Zinchenko, P. Nosov, V. Mateichuk, P. Mamenko, O. Grosheva // The International scientific and practical conference dedicated to the memory of professor Fomin Y.Y. and Semenov V. S. (FS - 2019), Odessa - Istanbul - Odessa, 24 – 28 April, 2019, proceedings. – ONMU, 2019. - P. 343-349.
 10. Сазонов А. Прогнозирование траектории движения судна при помощи нейронной сети [Электронный ресурс] / А. Сазонов, А. Сафронов, В. Дерябин // Вестник государственного университета морского и речного флота имени адмирала С. О. Макарова. – 2013. - Вып. 3. Точка доступа: <https://cyberleninka.ru/article/n/prognozirovanie-traektorii-dvizheniya-sudna-pri-pomoschi-neyronnoy-seti>.
 11. Xiong J. A Scheme on Indoor Tracking of Ship Dynamic Positioning Based on Distributed Multi-Sensor Data Fusion / J. Xiong, L. Shu, Q. Wang, W. Xu, Ch. Zhu // IEEE Access. – 2016. - Vol. – 5. - P. 379 – 392. DOI: 10.1109/ACCESS.2016.2607232
 12. Fossen T. I. Kalman filtering for positioning and heading control of ships and offshore rigs / T. I. Fossen, T. Perez // IEEE Control Systems Magazine. – 2009. - Vol. 29. - Issue 6. - P. 32 – 46. DOI: 10.1109/MCS.2009.934408
 13. Nielsen U. D. A novel approach for navigational guidance of ships using onboard monitoring systems / U. D. Nielsen, J. Jensen // Ocean Engineering. – 2011. - Vol. – 38. - Issues 2–3. - P. 444-455. DOI: 10.1016/j.oceaneng.2010.11.024
 14. Peng X. Ship motion prediction of combination forecasting model based on adaptive variable weight / X. Peng, B. Zhang, L. Rong // 34th Chinese Control Conference (CCC), 28-30 July, 2015: proceedings. - Hangozhou, China (Lecture Notes in IEEE Xplore. – 2015). DOI: 10.1109/ChiCC.2015.7260259
 15. Luo W. Blind Prediction of Ship Maneuvering by Using Support Vector Machines / W. Luo, Z. Zou // 29th International Conference on Ocean, Offshore and Arctic Engineering (ASME 2010), 6 – 11 June, 2010: proceeding. - Shanghai, China (Lecture Notes in American Society of Mechanical Engineers. – 2010. - P. 437- 443). DOI: 10.1115/OMAE2010-20723
 16. Wu X.. Maneuverability prediction for a ship with full-revolving twin propellers / X. Wu, X. Gao // Chinese Journal of Ship Research. - 2017. - Vol. 12. - Issue 1, DOI: 10.3969/j.issn.1673-3185.2017.01.005
 17. Лейбов Р. Обнаружение, локализация и парирование отказов датчиков и исполнительных устройств в цифровой системе управления / Р. Лейбов // Авиакосмическое приборостроение, 2005, № 12, С. 9-14, eLIBRARY ID: 1554169518
 18. Лейбов Р. Компенсация отказов датчиков цифровой системы автоматического управления с использованием кусочно – непрерывной линейной и нелинейной математических моделей объекта управления / Р. Лейбов, О. Гуревич // Авиакосмическое приборостроение – 2018. - №11. - С. 23-37. eLIBRARY:36515644
 19. Иноземцев А. Синтез оптимального наблюдателя при отказах в канале измерения систем автоматического контроля турбореактивного двухконтурного двигателя / А. Иноземцев, Н. Ламанова, А. Саженов, И. Лисовин, И. Грибков, А. Плещивых // Вестник пермского национального исследовательского политехнического университета. Аэрокосмическая техника. – 2019. - № 57. - С. 162-171. DOI: 10.15593/2224-9982/2019.57.1320
 20. Лейбов Р. Обнаружение, локализация и конкретизация отказов датчиков и исполнительных устройств с помощью квадратичной модели нелинейного объекта управления. Авиакосмическое приборостроение. – 2016. - № 4. - С. 24-42. eLIBRARY ID: 25836783
 21. Chen Y. M. Neural networks-based scheme for system failure detection and diagnosis / Y. M. Chen, M. L. Lee // Mathematics and Computers in Simulation. – 2002. - Vol. 58. - Issue 2. - P. 101-109. DOI: 10.1016/S0378-4754(01)00330-5
 22. Задорожная Н. Использование эталонной модели вращения космического аппарата для идентификации отказа измерителя угловой скорости / Н. Задорожная, П. Самус // Интернет – журнал «Науковедение». – 2015. - т.7. - № 4 (29). - С. 78. DOI: 10.15862/03TVN415